

# Rosemount 370XA Enclosure for Natural Gas Applications

Natural Gas Chromatographs are often used in isolated locations for custody transfer applications. This can leave the gas chromatograph vulnerable to tampering and the gas canisters susceptible to theft. In addition to isolated locations, the gas chromatograph and its sampling handling system can be exposed to extreme environmental conditions. These conditions may allow the gas in the sample system to fall below the Hydrocarbon Dew Point of the gas, causing liquid fallout and inaccurate flow measurements.

An insulated clamshell enclosure for the gas chromatograph and a small calibration gas cylinder provides protection from intrusion from un-authorized third parties and theft with its lead-seal feature. An optional heater ensures an ambient environment of 68 °F (20 °C) when outside temperatures drop to -4 °F (-20 °C), keeping the gas above its Hydrocarbon Dew Point.



Rosemount 370XA Enclosure

## Features

The enclosure meets CSA Class I, Division 1 certification and is easy to use. The enclosure comes with the gas chromatograph prewired to an external Class I, Division 1 junction box, reducing the complexity of installation and saving you time and costs.

### Designed for Extreme Environments

- UV, sea-water and fungi resistance
- Ability to lock and lead-seal the enclosure to prevent unauthorized 3<sup>rd</sup> party access

### Reduced Installation Costs

- Small, composite clamshell replaces the need for a conventional single room or dual room analyzer building that is cost prohibitive for lower volume applications
- Enclosure enables locating the Rosemount 370XA Gas Chromatograph close to the sample point, shortening the heated sample lines

- Internal tubing and wiring plumbed and connected to the Rosemount 370XA Gas Chromatograph before arriving in the field for easier and quicker field installation

### Ease of Use

- No need to remove the Rosemount 370XA Gas Chromatograph from the enclosure to perform routine maintenance as the enclosure is designed with sufficient space and big hands in mind
- Enclosure's clamshell lid with stainless steel lid stays and spring loaded retainer chains is easy to lift yet will not close accidentally for increased safety
- Heat-trace boot entry tubing for sample gas ensures thermal stability to keep the gas sufficiently above its Hydrocarbon Dew Point of the gases to avoid liquid fallout

## Optional Accessories

### Sample Probe Regulator


- 2-4-5000-610 (4") - Genie® Probe Regulator with HSNG/GAG/RLF, ¾" NPT, 4"
- 2-4-5000-617 (7") - Genie® Probe Regulator with HSNG/GAG/RLF, ¾" NPT, 7"
- 2-3-5000-702 - Genie® Drive Probe with HSNG/GAG/RLF, ¾" NPT, Adjustable Length

### Carrier Gas & Calibration Gas Accessories

- 2-3-5000-050 - Carrier Manifold (Allows for cylinder replacement without GC interruption)
- 2-4-9500-078 - Regulator, for Carrier cylinder, with CGA 580 fittings, Dual Stage for High Purity gases
- 2-4-9500-077 - Regulator, for Calibration Gas, CGA-510 fittings (Natural Gas)
- 2-9-0020-945 - C6+ Calibration gas in LP5 cylinder
- 2-9-9020-779 - Calibration Heater Blanket, 50 W, Class I, Div.1, Groups C, D (15 x 42)

## Part Number Ordering Matrix

Your part number is determined by your specific needs. Choose options below

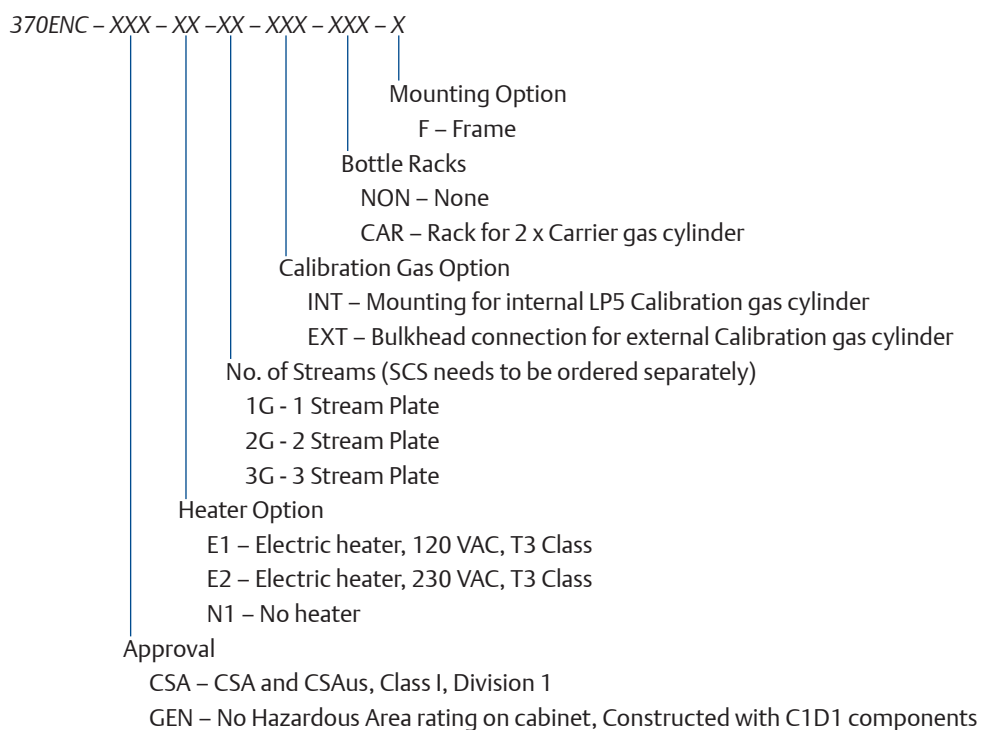

\*GC needs to be ordered as Wall Mount. Sample conditioning system for the Rosemount 370XA GC must also be ordered.

# Specifications

Please consult Rosemount if your requirements are outside the specifications listed. Improved performance, alternate products and material offerings may be available depending on the application.

## Construction

**Environmental Temperature:**

-4 °F to +140 °F (-20 °C to +60 °C)

**Protection Rating:**

External Junction Box: NEMA 4X

**Area Safety Certification Options:**

GEN: No Hazardous Rating, C1D1 components

CSA: CSA and CSAus Class I, Division 1

**Optional Heater:**

Electric, 120 VAC or 230 VAC, 300 W, T3

**Total Weight (Excludes Calibration Gas Cylinder)**

300 lbs (136 Kg)

**Material:**

Enclosure: Hot-pressed glass fiber reinforced polyester

Frame: Polyester-epoxy coated, 12 gauge

low-carbon steel

**Dimensions:**

Enclosure: 24" H x 52" W x 24" D


(609 mm H x 1320.8 mm W x 609 mm D)

Overall (with lid open): 84" H x 58" W x 35" D

(2142 mm H x 1479 mm x 889 mm D)


**Mounting:** Frame

## Dimensions

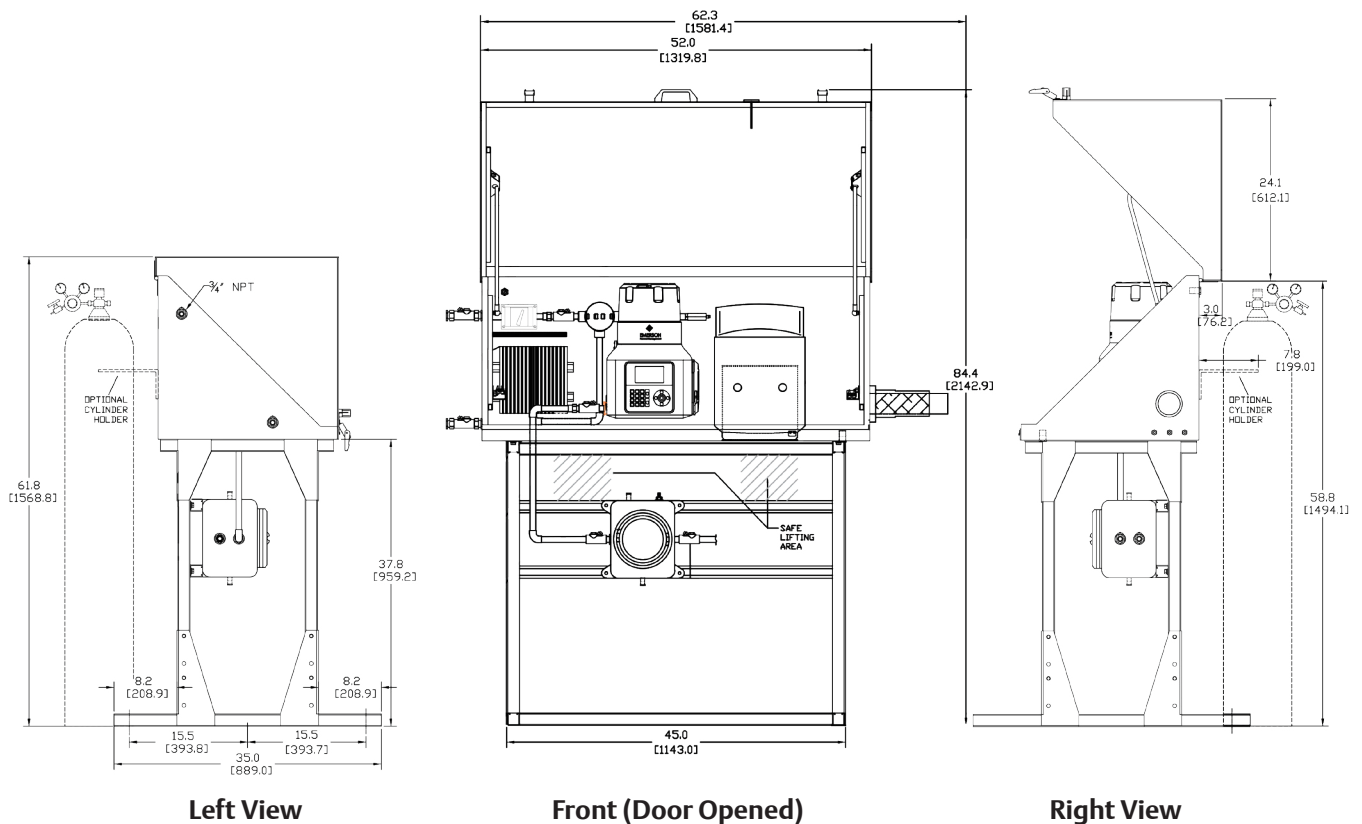

**EmersonProcess.com/GasAnalysis**

 [YouTube.com/user/RosemountAnalytical](https://www.youtube.com/user/RosemountAnalytical)

 [Twitter.com/Rosemount\\_News](https://twitter.com/Rosemount_News)

 [Analyticexpert.com](http://Analyticexpert.com)

 [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

©2016 Emerson Process Management. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.

**Emerson Process Management**  
10241 West Little York, Suite 200  
Houston, Texas 77040  
USA  
Toll Free + 866 422 3683  
T + 713 396 8880  
F + 713 466 8175  
[GC.CSC@Emerson.com](mailto:GC.CSC@Emerson.com)

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.