

Millennium Air Particle Monitor (APM)

Airborne Particle Monitor

The Millennium Air Particle Monitor (APM) is the only infrared optical monitor that is certified for use in hazardous areas for constant, reliable monitoring of ambient air for products of combustion such as smoke, oil mist, carbon, dust, and ash.

This unique product is explosion proof — ideally suited for a wide variety of industrial applications. Proven installed base includes Class I, Division 1 areas requiring accurate air particle monitoring such as air ducts, battery rooms, engine rooms, compressor stations, offshore living quarters, and HVAC air intake points.

- Explosion-proof, Class I, Division/Zone 1 approved
- Operating temperature range -40 °C to 75 °C
- 4–20 mA analog and relay output configurations
- Remote sensor separation - 600 m (2,000 ft) and a variety of duct mount assemblies available
- Intuitive menu system, zero in 60 seconds from start to finish
- Field adjustable sensitivity settings
- Not affected by high volume air velocity
- Multi-language, bright scrolling LED display allows operators to fine tune at installation site

The advanced sensor design has several performance features; it uses a powerful infrared lamp and no mirrors, making the optics resilient to the adverse effect of dirt. The instrument's field adjustable zero level of obscuration and multiple sensitivity settings allow for fine tuning to optimize performance and eliminate false alarms. Last, the sensor can be equipped with a duct mounting kit, pipe mounting kit, pipe extensions, and rain guard to suit many applications.



Millennium Air Particle Monitor (APM)

The Millennium Series controller is an innovative line of explosion proof industrial detectors. Its microcontroller provides fast, accurate, and continuous monitoring in hazardous area environments. The 4–20 mA analog signal and FORM-C mechanical relays easily integrate into industrial safety systems. The compact controller with power disconnect switch simplifies maintenance, a scrolling LED simplifies calibration and configuration, while meter jacks facilitate current loop monitoring.

The Millennium APM is market proven within a variety of specialized applications worldwide, providing superior performance and effectiveness.

Applications

Gas Compressor Stations, FSP0/Tanker Hull Chambers, Gas Turbine Engine Enclosures, Marine Battery Rooms, Engine Rooms, Duct Monitoring, Chemical Storage, Industrial Manufacturing, and HVAC Systems.

Specifications

Table 1 - Millennium Air Particle Monitor (APM)

Millennium APM Sensor Specifications	
Temperature Range	-40 °C to 75 °C (-40 °F to 167 °F)
Weight	Aluminum: 1.5 lbs, 0.6 kg Stainless steel: 4.0 lbs, 1.8 kg
Enclosure Material	Aluminum (AL6061) or stainless steel (SS316)
Certifications	<p>North America Class I, Division 1, Groups B, C, and D T5 AEx d IIB+H2 T5 (Class I, Zone 1, Groups IIB+H2 T5) ATEX (-X Model) CE 0575 @ IIG Ex d IIB+H2 T5 IP65 -40 °C to +75 °C</p> <p>IECEX (-X Model) Ex d IIB+H2 T5 Gb IP65 -40 °C to +75 °C</p>
Sensor Warranty	Two years


Millennium Transmitter/Controller	
Operating Voltage Range	10.5 to 32.0 VDC
Power Consumption	150 mA (3.6 W) at 24 VDC
Operating Temperature and Humidity Range	-40 °C to +85 °C (-40 °F to +185 °F) 0 to 95 % relative humidity, non-condensing
Output(s)	<p>Analog 4–20 mA: Max. loop impedance of 800 ohms at 32 VDC or 150 ohms at 10.5 VDC. Isolated or non-isolated loop supply</p> <p>Relays: Three FORM-C contacts for Fault, window condition, and alarm status. Rated 5 A at 30 VDC/250 VAC energized/de-energized, latching/non-latching</p>
Enclosure Material	Aluminum (AL6061) or stainless steel (SS316)
Weight	Aluminum: 6.0 lbs, 2.6 kg Stainless steel: 7.0 lbs, 3.2 kg
Warranty	Three years
Alphanumeric Display	Bright 8-digit LED scrolling type display - English, French, and Spanish languages available
Unique Features	Local power switch and meter test jacks on faceplate for easy maintenance Easy to read instructions for one-person, non-intrusive calibration
Certifications	<p>North America Class I, Division 1, Groups BCD, T4A Ex d IIB+H2 T5 (Class I, Zone 1 Group IIB+H2 T5) Type 4X ATEX (-X Model) CE 0575 @ IIG Ex d IIB+H2 T5 IP64 -40 °C to +75 °C</p> <p>IECEX (-X Model) Ex d IIB+H2 T5 Gb -40 °C to +75 °C</p>

Table 2 - Ordering Information

MLP-AR-APM-OP-SEP	4–20 mA and Relay Outputs, APM Sensor with Separation Box included	Additional Approvals: -X (ATEX/IECEX) Enclosure Material: Stainless Steel (-SS) [Aluminum is Standard]
Ordering Matrix Example: MLP-AR-APM-OP-SEP-X-S (Transmitter - Output - Sensor - Separation Box - Additional Approval - Optional Enclosure Material)		

Specifications Continuation

Table 2 - Accessories

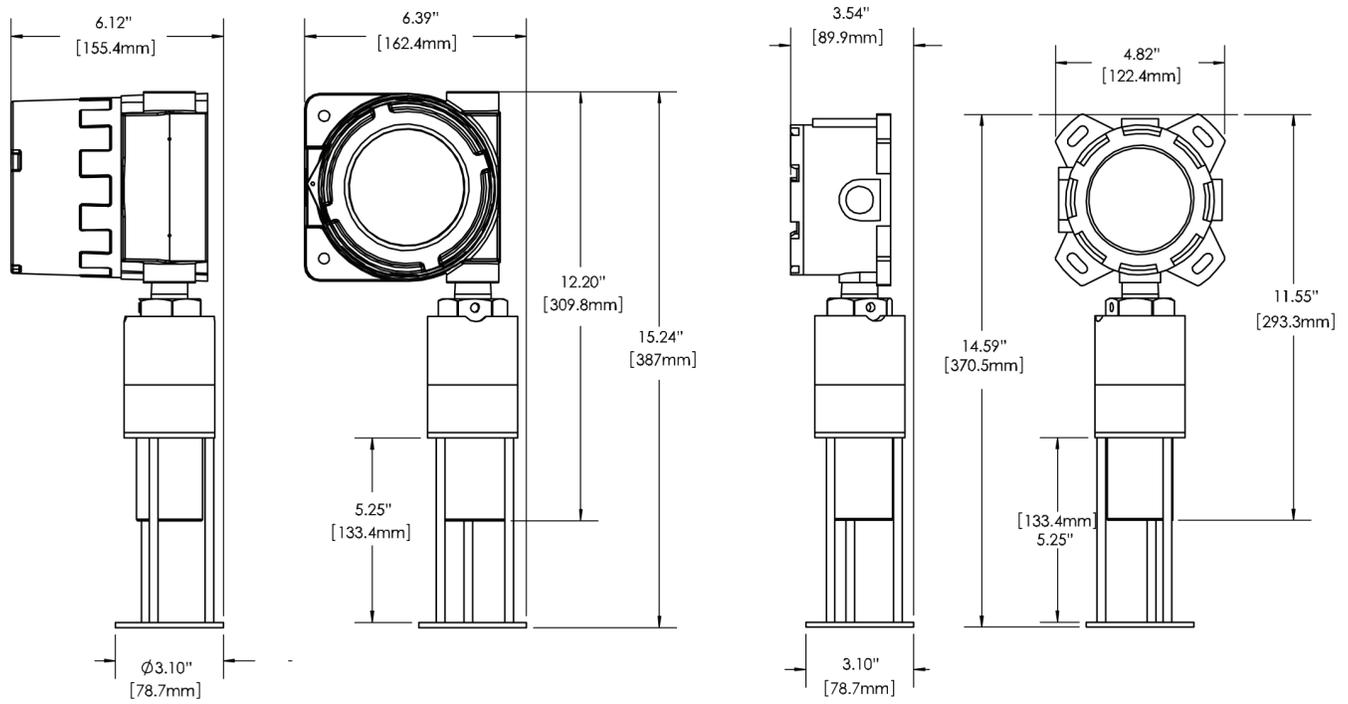

Accessories	
UN-MK-31	1" pipe mounting kit - stainless steel
UN-MK-32	2" pipe mounting kit - stainless steel
UN-MK-33	3" pipe mounting kit - stainless steel
SSK-51	1" pipe mounted sunshade kit/rain guard, stainless steel - includes UN-MK-31
SSK-52	2" pipe mounted sunshade kit/rain guard, stainless steel - includes UN-MK-32
SSK-53	3" pipe mounted sunshade kit/rain guard, stainless steel - includes UN-MK-33
UDM-001	Universal duct mount assembly with 1 m inlet sampling pipe, stainless steel
UDM-002	Universal duct mount assembly with 1.5 m inlet sampling pipe, stainless steel
UDM-003	Universal duct assembly, stainless steel
UDM-EX1	1 m extension - for use with UDM-001 and UDM-002, stainless steel
UDM-EX2	1.5 m extension - for use with UDM-001 and UDM-002, stainless steel

www.Emerson.com/RosemountFlameGasDetection



[YouTube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)



Analyticexpert.com



[Twitter.com/Rosemount_News](https://twitter.com/Rosemount_News)



[Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

Americas

Emerson

6021 Innovation Blvd.
Shakopee, MN 55379
USA

T + 1 866 347 3427
F + 1 952 949 7001

Safety.CSC@Emerson.com

Europe

Emerson AG

Neuhofstrasse 19a P.O. Box 1046
CH-6340 Baar
Switzerland

T + 41 (0) 41 768 6111
F + 41 (0) 41 768 6300

Safety.CSC@Emerson.com

Middle East & Asia

Emerson

Emerson FZE
Jebel Ali Free Zone
Dubai, UAE
P.O. Box 17033

T + 971 4 811 8100
F + 971 4 886 5465

Safety.CSC@Emerson.com

Asia Pacific

Emerson

1 Pandan Crescent
Singapore 128461
Singapore

T + 65 777 8211
F + 65 777 0947

Safety.CSC@Emerson.com

©2017 Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.