

M2B Transmitter

Single Channel Universal Gas Monitoring

The Millennium II Basic (M2B) universal transmitter is a robust and reliable safety solution delivering highly accurate monitoring of toxic and combustible gases. Utilizing our state-of-the-art sensor technology, it provides a flexible detection platform that includes all the advanced features users in the field demand with complete ease-of-use and operation.

- Compatible with ST3 and SC3 series sensors (Infrared, Catalytic Bead, Electrochemical)
- -67 °F to +185 °F (-55 °C to +85 °C)
-58 °F to +185 °F (-50 °C to +85 °C) North American explosion-proof certification
- Lowest power consumption available
- Wide voltage range allows for greater stability and system compatibility
- Nonintrusive menu system, simple set-up and calibrations via external magnet
- Field selectable gas curves and ranges
- Long range (+600 m/2,000 ft.) sensor separation through digital communication between transmitter and sensor

Streamlined Controller Design

Designed for applications that require a local, full-featured transmitter interface but do not require a character display. The Millennium II Basic includes a bright multi-colored LED indicator for Power/Alarm/Fault conditions with an optional HART® interface.

Universal Transmitter

A truly universal transmitter, the M2B can be fitted with a full range of both toxic or combustible gas sensors. The Millennium II sensors are pre-calibrated and easily connect to the transmitter which automatically recognizes a newly fitted sensor and uploads its specific configuration profile.



Millennium II Basic Gas Detection Transmitters

Digital Communications

The sensor and transmitter continuously communicate digitally, giving you the confidence of stable, accurate protection with fast response times even over long separation distances.

Global Certifications

The Millennium II Basic is approved to international hazardous area safety standards for operation and performance.

Analog, Relay, Modbus® RS485 RTU & HART®

Multiple communication protocols allow the M2B to work seamlessly with your new or existing system.

Field-proven Sensor Innovations

Our sensors are engineered to be fast and reliable with field-proven performance in the harshest industrial conditions. Sensors include electrochemical, catalytic bead with SensorGuard, which greatly prolongs sensor life, and point infrared. The infrared sensor offers a dual beam design with no mirrors, which increases the sensor's resilience to dust or other debris.

Specifications

Table 1 - Millennium II Basic Transmitter

Electrical	
Power Consumption	1.5 W @ 24 VDC (average - varies by sensor type/quantity)
Voltage Range	10.5–32.0 VDC (HART: 18–32 VDC)
EMC Compliance	EN 50270:2006 per EMC directive 2004/108/EC
Display	Multi-color LED Indication (Normal/Fault/Alarm)
Environmental	
Temperature	-67 °F to +185 °F (-55 °C to +85 °C) -58 °F to +185 °F (-50 °C to +85 °C) - North American explosion-proof certification
Relative Humidity	0–95 % RH non condensing
Enclosure	
Enclosure Material	Aluminum (6061) or 316 Stainless Steel
Conduit Opening	¾" NPT (3X)
Outputs	Optional: Analog 4–20 mA, Four 5 A Form C Relays, RS-485 Modbus® RTU, and HART®
Certifications	<p>North American Class I, Division 1, Groups BCD T5 Class I, Zone 1, AEx/Ex d IIB+ H2 T5 -50°C ≤ Ta ≤ + 85°C NEMA Type 4X/IP 67 FM6320, ANSI/ISA 12.13.01, CSA C22.2 No. 152:2006</p> <p>IECEX Ex d IIB+H2 T5 Gb -55°C ≤ Ta ≤ + 85°C IP67 IEC 60079-0:2011/IEC60079-1:2007 IECEX FMG 14.0010X</p> <p>Inmetro Ex d IIB+H2 T5 Gb IP67</p>
Sensors	Combustible Gases (SC3 Series): Infrared and Catalytic Bead Toxic Gases (ST3 Series): Electrochemical
Warranty	3 years
Mounting	Surface Mount/Pipe Mount/Duct Mount
Weight	Aluminum: 0.8 kg (2.0 lbs), Stainless Steel (316SS): 1.6 kg (3.5 lbs)

Ordering Information	
M2B-A	Single Channel - Analog
M2B-R	Single Channel - Relay
M2B-D	Single Channel - RS485 Modbus®
M2B-AH	Single Channel - Analog & HART®
Enclosure Available: Aluminum (-A) Stainless Steel (-S)	
Ordering Matrix Example: M2B-A-S (Transmitter - Output - Enclosure - Material)	


Special Features
<ul style="list-style-type: none"> ■ Nonintrusive one man calibration (magnetic switch) ■ Field selectable toxic gas ranges ■ Field selectable combustible gas curves

Accessories
<ul style="list-style-type: none"> ■ HART® Port Adaptor ■ Mounting Bracket c/w Hardware ■ Sun Shade/Deluge Protection ■ Duct Mount and Hardware Kit

Specifications

Table 2 - Accessories

Accessories	
UDM-001	Universal duct mount assembly with 1 M inlet sampling pipe - Stainless Steel
UDM-002	Universal duct mount assembly with 1.5 M inlet sampling pipe - Stainless Steel
UDM-003	Universal duct mount assembly - Stainless Steel
UDM-EX1	1 M extension - for use with UDM-001 and UDM-002 - Stainless Steel
UDM-EX2	1.5 M extension - for use with UDM-001 and UDM-002 - Stainless Steel
UN-MK-31	1" Pipe Mounting kit c/w stainless steel mounting bracket and hardware
UN-MK-32	2" Pipe Mounting kit c/w stainless steel mounting bracket and hardware
UN-MK-33	3" Pipe Mounting kit c/w stainless steel mounting bracket and hardware
HPT-001	HART® Communicator port, mounts directly to JB-MPH-A/S or Millennium II transmitter
SSK-51	1" Pipe Mounted Sun shade kit/rain guard - Stainless steel - includes UN-MK-31 Mounting Kit
SSK-52	2" Pipe Mounted Sun shade kit/rain guard - Stainless steel - includes UN-MK-32 Mounting Kit
SSK-53	3" Pipe Mounted Sun shade kit/rain guard - Stainless steel - includes UN-MK-33 Mounting Kit

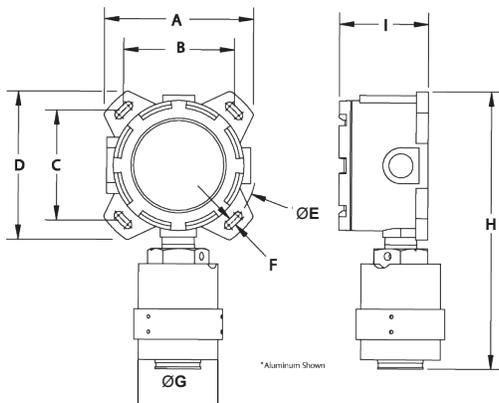

	A		B		C		D		E	
	in	mm	in	mm	in	mm	in	mm	in	mm
Aluminum Housings	4.8	122	3.6	92	3.6	92	4.8	122	5.1	130
Stainless Steel Housings	4.7	119	3.6	92	3.6	92	4.7	119	5.1	130
	F		G		H		I			
	in	mm	in	mm	in	mm	in	mm		
Aluminum Housings	0.3	8	2.6	66	9.0	229	3.3	84		
Stainless Steel Housings	0.3	8	2.6	66	8.9	226	3.2	81		

EmersonProcess.com/FlameGasDetection



YouTube.com/user/RosemountAnalytical



Analyticexpert.com



Twitter.com/Rosemount_News



Facebook.com/Rosemount

Americas

Emerson

6021 Innovation Blvd.
Shakopee, MN 55379
USA

T + 1 866 347 3427
F + 1 952 949 7001

Safety.CSC@Emerson.com

Europe

Emerson Management AG

Neuhofstrasse 19a P.O. Box 1046
CH-6340 Baar
Switzerland

T + 41 (0) 41 768 6111
F + 41 (0) 41 768 6300

Safety.CSC@Emerson.com

Middle East & Asia

Emerson

Emerson FZE
Jebel Ali Free Zone
Dubai, UAE
P.O. Box 17033

T + 971 4 811 8100
F + 971 4 886 5465

Safety.CSC@Emerson.com

Asia Pacific

Emerson

1 Pandan Crescent
Singapore 128461
Singapore

T + 65 777 8211
F + 65 777 0947

Safety.CSC@Emerson.com

©2016 Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. All other marks are the property of their respective owners.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.