

# Shafer™ RV-Series Rotary Vane Valve Actuators

## Operating Valves in Critical Pipeline Applications



SHAFFER™

  
EMERSON™



## Applications

Emerson – Actuation Technologies is recognized worldwide for the reliability of its actuators under the most demanding conditions. The Shafer™ RV-Series rotary vane actuator was specifically designed for pipeline applications where rugged dependability of equipment is vital.

Shafer rotary vane actuators are used to automate ball valves or plug valves in all types of severe climatic conditions. Over the last 60 years, more than 100,000 rotary vane actuators have been successfully installed on various kinds of pipelines, and most of the actuators are still in operation.

### *Emergency Shut Down & Linebreak Protection*

*We take on the most  
critical applications.*

*That's our business!*

*Exceptional reliability  
with minimal  
maintenance*


- Full open/close operation of ball valves and plug valves
- Automation of valves on natural gas pipelines where the actuators are typically powered by natural gas using gas-over-oil technology
  - Emergency Shut Down
  - Mainline isolation
  - Linebreak protection
  - Station blow down
  - Remote valve control
  - Hi/low pressure shutoff
  - River crossings
- The rotary vane's compact size and concentric weight distribution make it ideal for high vibration applications
  - Slurry pipelines
  - Pump and compressor stations
- Valve automation for crude oil or refined products pipelines with precise control of the stroking speed



## Capabilities

- Torque output range:  
1,000 lbf-in to 17.8 million lbf-in  
(113 Nm to 2.0 million Nm)
- Power supply pressure range:  
200 psi (13.8 bar) minimum, up to 3,000 psi (206.8 bar)  
on various models
- Ambient temperature range:  
-20°F to 250°F (-29°C to 121°C) Standard  
-50°F to 250°F (-46°C to 121°C) Optional  
-76°F to 250°F (-60°C to 121°C) Consult Factory

# Capabilities

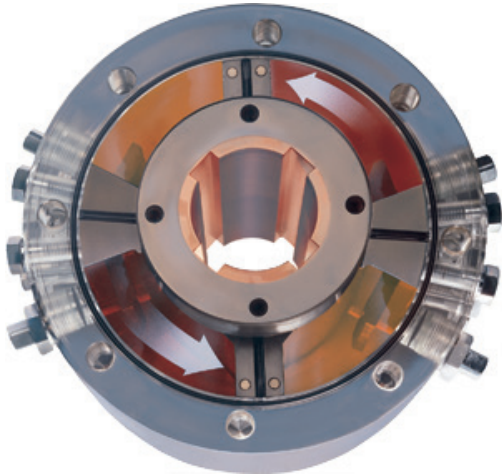


The rotary vane is a hydraulic powered actuator. Hydraulic force simultaneously forces both of the rotor's vanes away from the stationary shoes producing rotation and perfectly balanced torque output. Hydraulic input power is reversed for rotation in the opposite direction.


There is no conversion of linear to rotary motion, so this highly efficient actuator design produces perfectly balanced torque.

The rotary vane actuator models an ideal torque couple. The resultant force vectors acting on the vanes are always perpendicular to the vane surface. The two opposing forces form a torque couple which is the most efficient method of producing rotation.

The balanced torque output of the rotary vane actuator will not produce any destructive side loading forces that could be transmitted to the valve stem or the actuator's bearings.

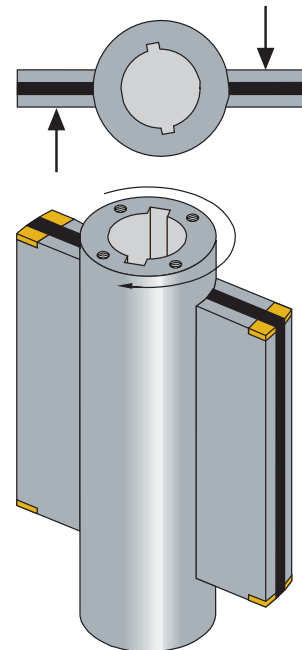

## TORQUE OUTPUT PROFILE

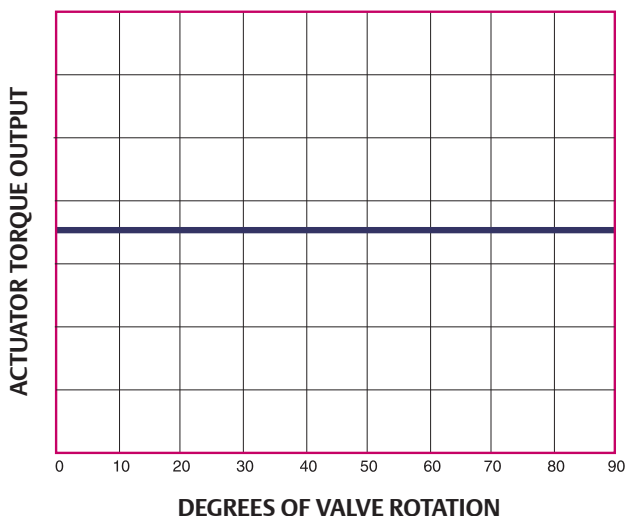


Torque output of the rotary vane actuator remains constant throughout the full rotation of the valve. This ensures that your specified safety factor will not be jeopardized at different positions during the valve stroke. Constant torque output is an especially important feature in the following applications:

- Potentially high flow applications like blow down and line break
- Plug valves or metal to metal seated valves
- Ball valves with rotating seats



# Construction

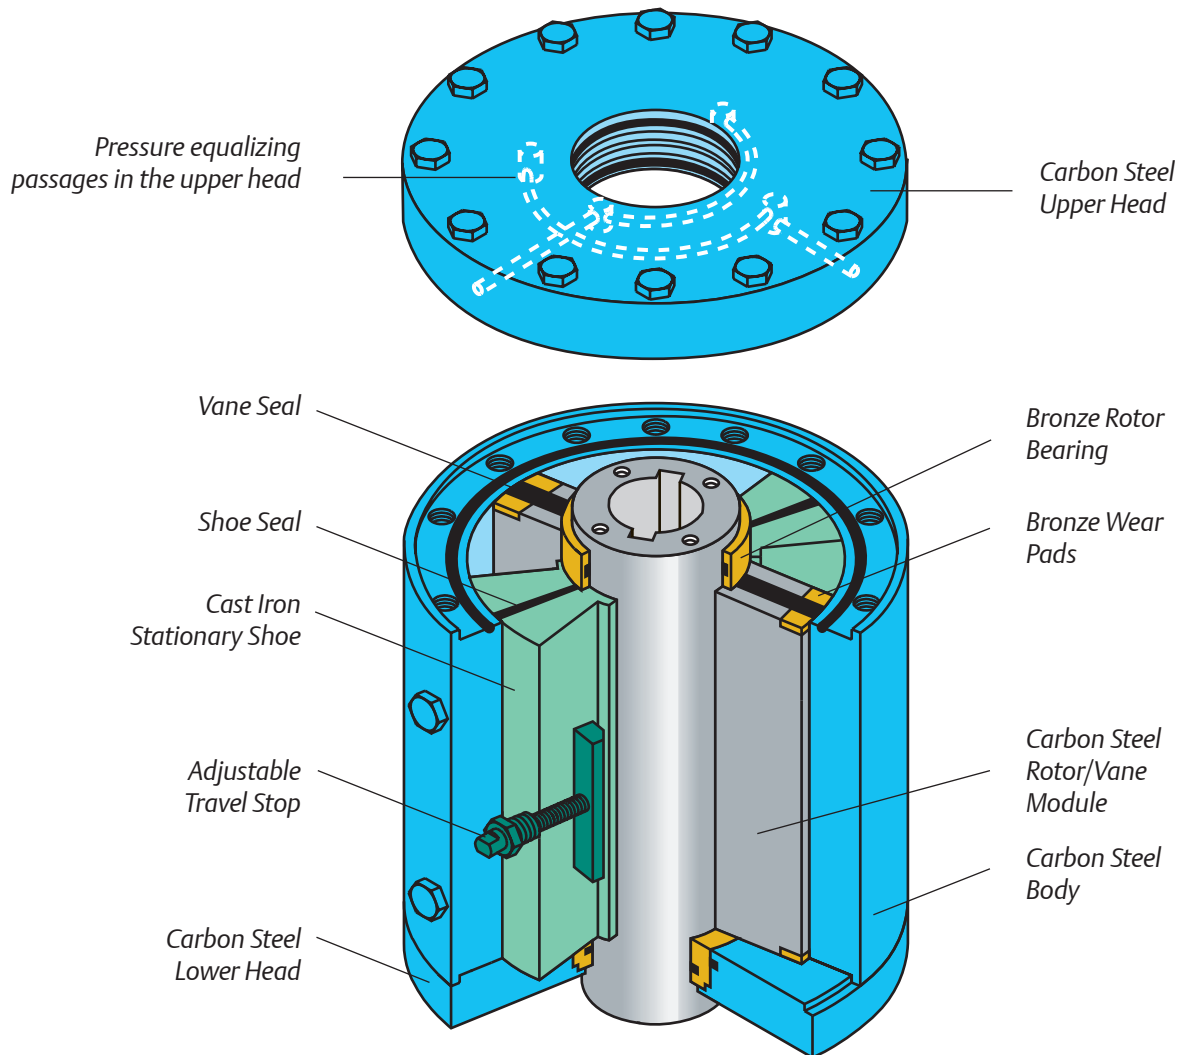


# Performance Features

- Life expectancy is 50 years with minimal maintenance
- Proven reliability backed by a 10 year warranty
- The most compact actuator available
- The double vane design will not generate any side loading forces on the valve stem or actuator bearings
- Constant torque output over the full 90° rotation
- Vibration resistant with the actuator body centered directly over the valve stem and weight equally distributed over the valve flange
- Maximum rated pressure and maximum operating pressure are equal
- Valve response is always smooth and always dependable




# Operating Sequence

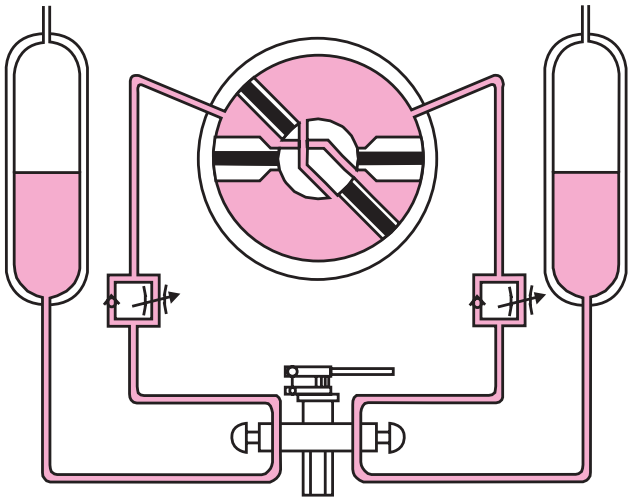


## SEQUENCE 1

The actuator may be powered by a hydraulic power unit, stored gas pressure or by natural gas pressure from a pipeline. In this illustration, the actuator is fitted with gas hydraulic tanks and is powered by gas pressure. In the first sequence, the actuator is in the open position. There is no pressure in the actuator or tanks.

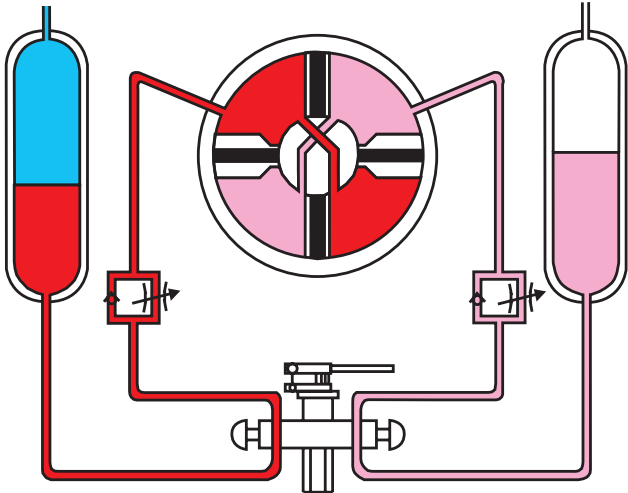




## SEQUENCE 2

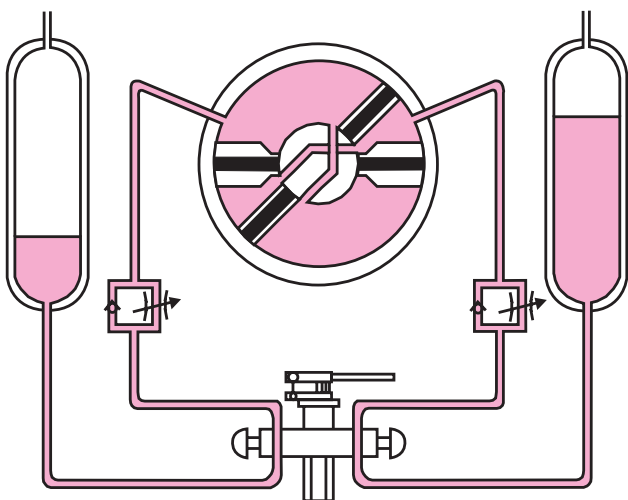The actuator control system is used to admit high pressure gas into the closing gas hydraulic tank. The pressurized gas in the tank forces hydraulic fluid into the actuator's closing port. Pressure equalizing passages allow both closing quadrants to be pressurized simultaneously providing balanced torque as the vanes push away from the stationary shoes. The actuator is rotating clockwise.



## SEQUENCE 3

When the actuator reaches the fully closed position, the control system will allow all remaining pressure in the tank to vent to atmosphere, thus neutralizing the pressure in the tank and actuator.

-  High Pressure Gas
-  Pressurized Hydraulic Fluid
-  Non-Pressurized Hydraulic Fluid




Shafer designs, builds and tests the complete valve operating system, including the actuator, controls and accessories. When you specify Shafer, you receive a complete system, factory tested, field proven and **guaranteed**.

Shafer RV-Series actuators can be operated locally, remotely or automatically by a variety of sensory and control devices. We have developed more than 4000 individual control systems to meet the many requirements of our customers.

### TYPICAL CONTROL SYSTEMS


- Local manual
- Remote two-way electric
- Linebreak Protection sensing rate of pressure drop
- Emergency Shutdown (ESD) or fail-safe
- High/low pressure shutoff

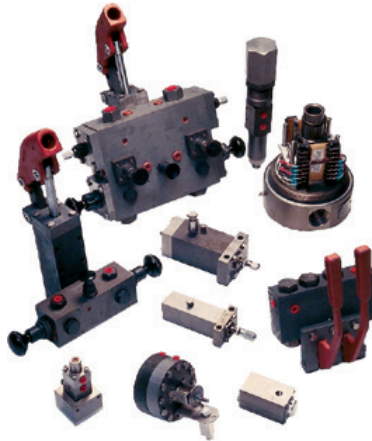

All accessories have undergone thorough testing and field evaluation to insure their performance as part of a larger system

### COMMON ACCESSORIES

- Manual hydraulic hand pump
- Control valves –hydraulic and pneumatic
- Sensors for automatic operation
- Power storage vessels
- Power supply units
- Limit switches and position transmitters
- Speed controls
- Regulators
- Filters



*Proven reliability  
backed by a 10 year  
warranty*

*More than 4000  
control systems  
developed.*

*We design, build and  
test the complete  
valve control system*



**World Area Configuration Centers (WACC) offer sales support, service, inventory and commissioning to our global customers. Choose the WACC or sales office nearest you:**

***NORTH & SOUTH AMERICA***

19200 Northwest Freeway  
Houston TX 77065  
USA  
T +1 281 477 4100  
F +1 281 477 2809

Av. Hollingsworth  
325 Iporanga Sorocaba  
SP 18087-105  
Brazil  
T +55 15 3238 3788  
F +55 15 3228 3300

***ASIA PACIFIC***

No. 9 Gul Road  
#01-02 Singapore 629361  
T +65 6777 8211  
F +65 6268 0028

No. 1 Lai Yuan Road  
Wuqing Development Area  
Tianjin 301700  
P. R. China  
T +86 22 8212 3300  
F +86 22 8212 3308

***MIDDLE EAST & AFRICA***

P. O. Box 17033  
Dubai  
United Arab Emirates  
T +971 4 811 8100  
F +971 4 886 5465

P. O. Box 10305  
Jubail 31961  
Saudi Arabia  
T +966 3 340 8650  
F +966 3 340 8790

24 Angus Crescent  
Longmeadow Business Estate East  
P.O. Box 6908 Greenstone  
1616 Modderfontein Extension 5  
South Africa  
T +27 11 451 3700  
F +27 11 451 3800

***EUROPE***

Berenyi u. 72- 100  
Videoton Industry Park  
Building #230  
Székesfehérvár 8000  
Hungary  
T +36 22 53 09 50  
F +36 22 54 37 00

For complete list of sales and manufacturing sites, please visit [www.emerson.com/actuationtechnologieslocations](http://www.emerson.com/actuationtechnologieslocations) or contact us at [info.actuationtechnologies@emerson.com](mailto:info.actuationtechnologies@emerson.com)

©2017 Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Shafer™ is a mark of the Emerson family of companies. All other marks are property of their respective owners.

**SHAFER™**

DOC.8P.SRV.US Rev E 06-17

[www.emerson.com/shafer](http://www.emerson.com/shafer)

