Material List ML.CBx.01.01 Rev. 0 October 2017

Bettis CBB/CBA300-Series Pneumatic Valve Actuator

Component Material List



BETTIS

Table of Contents

Section 1: Major Component Material List

1.1	Typical CBB-Series Major Component Material List	4
-----	--	---


Section 2: Seal Material List

Section 3: Typical Coatings

3.1	Nitriding	9
	Teflon lined cylinder bores	

Section 1: Major Component Material List

1.1 Typical CBB-Series Major Component Material List

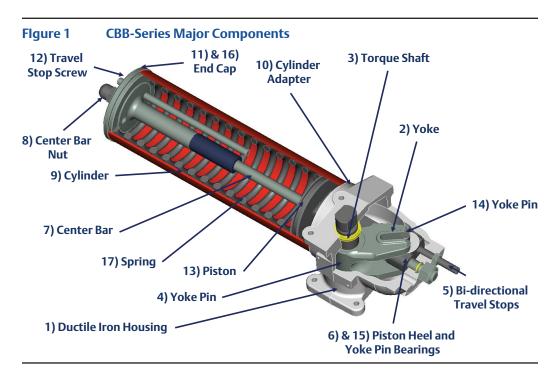

-	_		
Tab	le 1	Materia	List

Item	Description	Material	
	Housing		
1	Housing	Cast Ductile Iron	ASTM A395
2	Yoke, CBBx15 & CBBx20	Cast steel	ASTM A732
	Yoke, CBBx25	Cast Ductile Iron	ASTM A536
3	Torque shaft	Alloy steel	ASTM A311
4	Yoke key	Steel	ASTM A108
5	Travel stop screw	Alloy steel, Zinc plated	ASTM A193
	Travel stop screw nut	Alloy steel, Zinc plated	ASTM A194
6	Yoke/Yoke pin bearing	UHMWPE plastic	
7	Centerbar	Alloy steel, Nitrided	ASTM A193
8	Centerbar nut	Alloy steel, Zinc plated	ASTM A194

	Pneumatic Power Cylinder		
9	Cylinder	Steel, TFE lined	ASTM A513
10	Cylinder adapter	Cast Ductile Iron	ASTM A395
11	Outer endcap, DA	Steel	ASTM A516
12	Travel stop screw	Alloy steel, Zinc plated	ASTM A193
	Travel stop screw nut	Alloy steel, Zinc plated	ASTM A194
13	Piston, standard	Cast Aluminum	ASTM B108
	Piston, optional	Cast Ductile Iron	ASTM A536
14	Yoke pin	Steel, TFE coated	ASTM A108
15	Piston heel bearing	Steel/Bronze/TFE	Garlock DU Style
	Spring Cartridge		
16	Outer endcap, SR	Cast Ductile Iron	ASTM A536
17	Spring	Alloy steel	ASTM A229

1.2 Typical CBA300-Series Major Component Material List

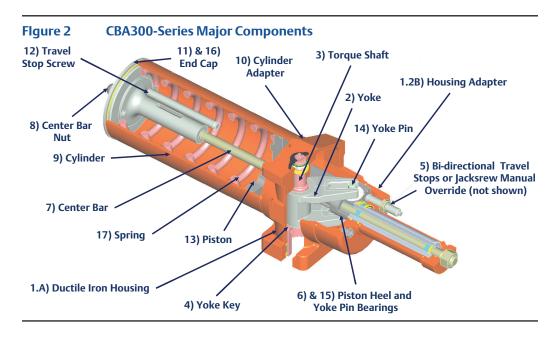


Table 2. Material List

ltem	Description	Material	
	Housing		
1.A	Housing	Cast Ductile Iron	ASTM A395
1.B	Housing adapter	Cast Ductile Iron	ASTM A395
2	Yoke,	Cast Ductile Iron	ASTM A536
3	Torque shaft	Alloy steel, Nitrided	AISI 4140 HT
4	Yoke key	Steel	ASTM A108
5	Travel stop screw	Alloy steel, Zinc plated	ASTM A193
	Travel stop screw nut	Alloy steel, Zinc plated	ASTM A563
6	Yoke/Yoke pin bearing	UHMWPE plastic	
7	Centerbar	Alloy steel, Nitrided	ASTM A193
8	Centerbar nut	Alloy steel, Zinc plated	ASTM A194

	Pneumatic Power Cylinder		
9	Cylinder	Steel, TFE lined	ASTM A513
10	Cylinder adapter	Steel	ASTM A516
11	Outer endcap, DA	Steel	ASTM A516
12	Travel stop screw	Alloy steel, Zinc plated	ASTM A193
12	Travel stop screw nut	Alloy steel, Zinc plated	ASTM A563
13	Piston	Cast Ductile Iron	ASTM A536
14	Yoke pin	Alloy steel	AISI 4140 HT
15	Piston heel bearing	Steel/Bronze/TFE	Garlock DU Style
	Yoke pin bearing	Steel/Bronze/TFE	Garlock DU Style
	Rod bushing	Acetal plastic	
	Piston bearing	TFE	
	Spring Cartridge		
16	Outer endcap, SR	Cast Ductile Iron	ASTM A536
17	Spring	Alloy steel	ASTM A689

Section 2: Seal Material List

2.1 Typical CBB/CBA300-Series Seal Material List

Description	Туре	Application
Piston OD / Cylinder ID	O-ring / D-ring	Dynamic
Piston / Centerbar	O-ring / T-seal	Dynamic
Torque shaft	O-ring	Rotary
All remaining seals	O-ring	Static

Section 3: Typical Coatings

3.1 Nitriding

Bettis utilizes a Nitride surface finish on many component parts instead of Chrome or Nickel plating.

The nitrided surface is not a coating, it is an integral part of the component base material. Because of this, it will not pitt, crack, chip or flake off and any possibility of hydrogen embrittlement (a common problem in any plating process) is eliminated.

The Nitride surface layer is extremely hard and displays improved wear resistance when compared with plated coatings. Dent resistance is also improved.

The Nitride surface layer has also been shown to display superior corrosion resistance to plated coatings.

Nitride surface finishing has become very popular in the fluid power industry in the past decade replacing chrome and nickel plating in many applications.

Typical components - piston rods, tiebars, CBB centerbars, cylinder bores, pistons.

Typical process results in a thin surface layer of iron oxide over a second layer of porous Iron Nitride over a third layer of non-porous Iron Nitride all fused on top of the base substrate steel material.

3.2 Teflon lined cylinder bores

The standard coating on all Bettis pneumatic cylinder bores is Xylan, a proprietary Teflon coating.

The use of this Teflon lining results in superior corrosion resistance while improving seal life and overall actuator performance.

World Area Configuration Centers (WACC) offer sales support, service, inventory and commissioning to our global customers. Choose the WACC or sales office nearest you:

NORTH & SOUTH AMERICA

MIDDLE EAST & AFRICA

19200 Northwest Freeway Houston TX 77065 USA T +1 281 477 4100 F +1 281 477 2809

Av. Hollingsworth 325 Iporanga Sorocaba SP 18087-105 Brazil T +55 15 3238 3788 F +55 15 3228 3300

ASIA PACIFIC

No. 9 Gul Road #01-02 Singapore 629361 T +65 6777 8211 F +65 6268 0028

No. 1 Lai Yuan Road Wuqing Development Area Tianjin 301700 P. R. China T +86 22 8212 3300 F +86 22 8212 3308 P. O. Box 17033 Dubai United Arab Emirates T +971 4 811 8100 F +971 4 886 5465

P. O. Box 10305 Jubail 31961 Saudi Arabia T +966 3 340 8650 F +966 3 340 8790

24 Angus Crescent Longmeadow Business Estate East P.O. Box 6908 Greenstone 1616 Modderfontein Extension 5 South Africa T +27 11 451 3700 F +27 11 451 3800

EUROPE

Berenyi u. 72- 100 Videoton Industry Park Building #230 Székesfehérvár 8000 Hungary T +36 22 53 0950 F +36 22 54 3700

For complete list of sales and manufacturing sites, please visit www.emerson.com/actuationtechnologieslocations or contact us at info.actuationtechnologies@emerson.com

www.emerson.com/bettis

©2017 Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. BettisTM is a mark of one of the Emerson family of companies. All other marks are property of their respective owners.

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.



